


Bar Code Scanning and Decoding

**controlled
in one unit**

611 Slot Reader with Pen

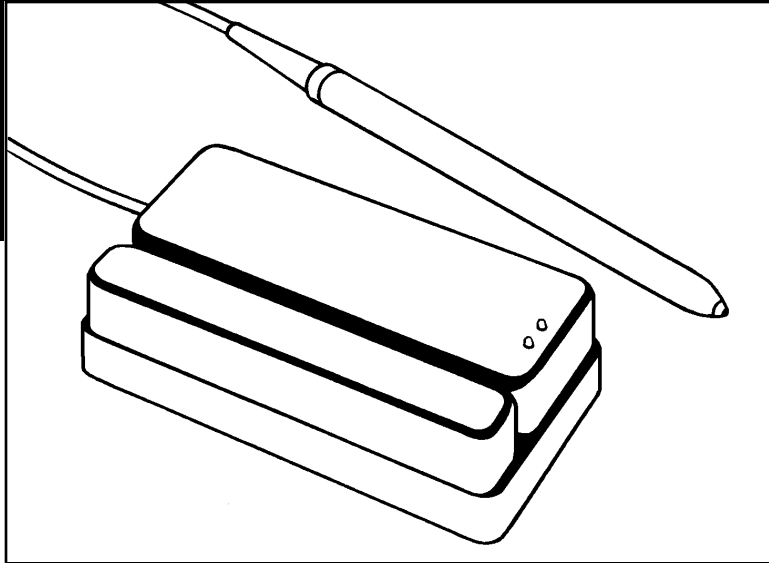

The 611 is a bar code slot reader with optional pen input and PC wedge output. The reader connects easily between the keyboard and the PC.

- **Programmable LEDs**
- **PC wedge output**
- **User programmable**



160 Oak St., Glastonbury, CT 06033 USA
Tel: (860) 659-9660 Fax: (860) 657-3860
email: webmaster@interbar.com
<http://interbar.com>

611 Reader Specifications

Bar Code Scanning Speed

3"-30" per second
(7.62 cm -76.2 cm/sec)

Scanning Direction

Bi-directional

Symbologies

Code 39, Code 128, 2 of 5,
I 2 of 5, UPCA, EAN 13, Codabar

Interface

PC wedge

Resolution

7 mil (high)
13 mil (low)

Light Source

630nm visible
940nm infrared

Slot Width

0.050" (1.27 mm)

Read Height

4.0" standard (10.16 cm)
4.65" optional (11.81 cm)

Indicators

2 programmable LEDs

Temperature

-40° to +85°C standard

Dimensions

4.6"L x 2.4"W x 1.4"H
(11.68 cm L x 6.10 cm W
x 3.56 cm H)

Weight

6 ounces

Material


Black polycarbonate (lexan)

Power

5V, approximately 100mA

How to Order

Order the 611 reader with a code to indicate options required.

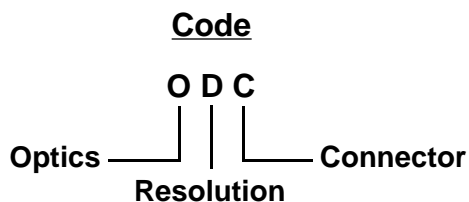**Example**

611 IH1 – 611 reader with high resolution
infrared optics and PS2 connector.

Options Available**Optics**

Visible – V
Infrared – I

Resolution

Low – L
High – H

Connector

AT connector – P
PS2 connector – 1



160 Oak St., Glastonbury, CT 06033 USA
Tel: (860) 659-9660 Fax: (860) 657-3860