

Decoded Magnetic Stripe Reader

M400




International Bar Code

The low-cost solution to magnetic stripe reading requirements.

- **Factory programmable**
- **1 and 2 track units available**
- **RS232, PC wedge or PC serial port powered**

160 Oak Street
Glastonbury, CT 06033 USA
Tel: (860) 659-9660
Fax: (860) 657-3860
email: webmaster@interbar.com
<http://interbar.com>

M400 Specifications

Magnetic Stripe

Track 2 (low density)
Track 1 (high density)

Magnetic Stripe Direction

Bi-directional

Interfaces

RS232
Keyboard wedge
PC serial port powered

Slot Width

0.050" (1.27 mm)

Weight

6 ounces

Temperature

-40° to +85°C standard

Material

Black Polycarbonate

Dimensions


4.6"L x 2.4"W x 1.4"H
(11.68 cm L x 6.10 cm W x 3.56 cm H)

Power

5V
12V (optional)

How To Order

Order M400 with a code to indicate options required.

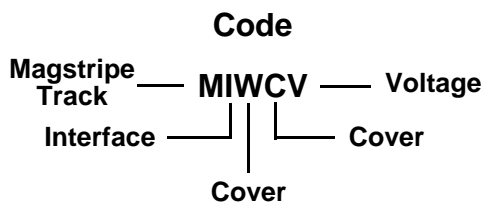

Example

M400-2SR65

M400 with track 2 only, RS232 output, RJ12 rear entry connector, #6 mounting backplate, 5V supply.

Options Available

Magstripe Track

Track 2 – 2
Tracks 1 & 2 – 1

Interface

RS232 – S
PC Wedge XT/AT – P
PC Wedge PS2 – 1
PC Serial Port Powered – X

Cover

#6 – 6
3mm – M

Connector

RJ12 Rear Entry – R
RJ11 Side Entry – S
PC Wedge – P

Voltage

5V – 5
8V-15V – 2

