


Portable Bar Code Reading

**for Data
Collection**

**Smart
Slot DC**

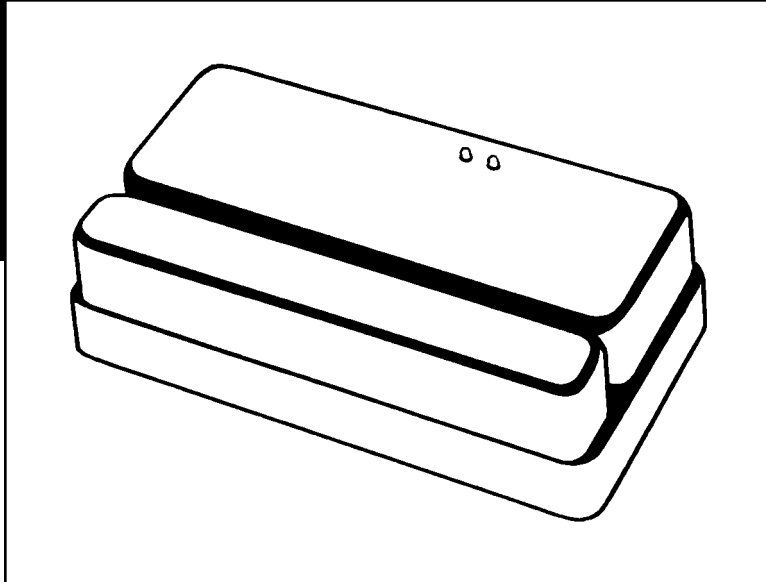

The Smart Slot DC is a portable data collection device which can be used anywhere barcodes need to be scanned and recorded, such as collecting attendance information or scanning cards at admission gates.

- **128K internal memory for transaction logging**
- **Visible and infrared versions available**
- **Date/time stamping**
- **Duplicate read detection**
- **Printer logging**



160 Oak St., Glastonbury, CT 06033 USA
Tel: (860) 659-9660 Fax: (860) 657-3860
email: sales@interbar.com
<http://interbar.com>

Smart Slot DC Specifications

Bar Code Scanning Speed

3"-30" per second
(7.62 cm -76.2 cm/sec)

Scanning Direction

Bi-directional

Symbologies

Code 39, 2 of 5, I 2 of 5,
Code 128, Codabar,
EAN 13, UPCA

Resolution

5 mil (high)
10 mil (low)

Read Height

0.4" standard (1.02 cm)
0.465" optional (1.19 cm)

Interface

RS232

Slot Width

0.050" (1.27 mm)

Indicators

2 programmable LEDs

Light Source

630nm visible
940nm infrared

Temperature

-40° to +85°C standard

Dimensions

4.6"L x 2.4"W x 1.4"H
(11.68 cm L x 6.10 cm W
x 3.56 cm H)

Weight

7 ounces (198.5 grams)

Material

Black polycarbonate

Power

8-15VDC or
9VDC battery

Standard Wiring

3 ft. (91.5 cm) cable with
DB9 connector, or battery
and communications jacks
with detachable cables


Memory

128K

How To Order

Order Smart Slot DC with a code to indicate options required.

Code

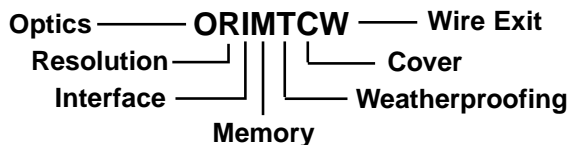

Example

Smart Slot DC-VLS106S=

Smart Slot DC with visible optics, low resolution, RS232 interface, 128K memory, no weatherproofing, #6 screw size mtg. back cover and side wire exit.

Options Available

Optics

Visible - V
Infrared - I

Resolution

Low - L
High - H

Interface

RS232 - S

Memory

128K - 1

Weatherproofing

No weatherproofing - 0
Weatherproofing - W

Cover

#6 - 6
3mm - M

Wire Exit

Side (DB9) - S
Rear - R
Side Internal Jacks - J
Internal Battery - I
Internal battery/external AC - A

