

Stand Alone Barcode Reader

Smart Slot STA

**for stand alone
access control
and time
and attendance**


International Bar Code



The Smart Slot STA is a stand alone access control and time and attendance reader with internal memory, an internal time clock and an internal audit trail. It is available as a fixed mount or portable reader. The fixed mount reader contains an internal relay which is used for door control. The portable version is meant for use at monitored stations, such as guard shacks, and uses the LEDs to signal access granted or denied. Access is controlled by validation of badge numbers stored in the internal memory of the reader. Valid numbers can be downloaded into the reader from a PC or scanned into the reader by hand. The reader can restrict access to specific times of day, and the audit trail can be uploaded to a PC at any time.

- Visible or infrared optics
- Programmable masking
- Addressable (networked) using RS422 or TCP/IP
- Bidirectional reading
- Supports scheduling (time/day access restrictions)
- Portable version available
- POE w/EZPower

160 Oak Street
Glastonbury, CT 06033 USA
Tel: (860) 659-9660
Fax: (860) 657-3860
email: info@interbar.com
<http://interbar.com>

Smart Slot STA Specifications

Barcode Scanning Speed

3"-30" per second
(7.62 cm -76.2 cm/sec)

Scanning Direction

Bi-directional

Symbologies

Code 39, 2 of 5, I 2 of 5,
Code 128, Codabar, EAN
13, UPCA

Interfaces

See below

Resolution

5 mil (high)
10 mil (low)

Read Height

0.4" standard (1.02 cm)
0.465" optional (1.19 cm)

Good Read Beep

Programmable

Slot Width

0.050" (1.27 mm)

Indicators

2 programmable LEDs

Light Source

630nm visible
940nm infrared

Temperature

-40° to +85°C standard

Dimensions

4.6"L x 2.4"W x 1.4"H
(11.68 cm L x 6.10 cm W
x 3.56 cm H)

Weight

7 ounces (198.5 grams)

Material

Black polycarbonate

Power*

5V 150mA typical 250 max
12V 90mA typical 140 max
24V 45mA typical 75 max

Relay

1 amp, 35VDC; 1 common
lead, 1 lead normally closed,
1 lead normally open

Standard Wiring

3 ft. (91.5 cm) cable with
flying leads for data and
power, 3 ft. cable for relay

Memory

128K standard
512K optional

Displays


8 char. alpha display (opt.)

* Maximum power consumption does not include alphanumeric displays. 5VDC readers have a voltage tolerance of +/-5%.
12VDC readers may be operated from 8VDC - 15VDC. 24VDC readers may be operated from 15VDC - 30VDC.

How To Order

Order Smart Slot STA with a code to indicate options required.

Code

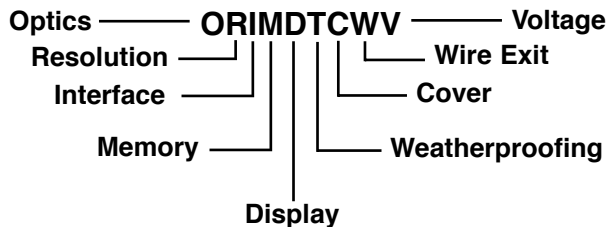

Example

Smart Slot STA-VLS1A06R5=

Smart Slot STA with visible optics, low resolution, RS232 interface, 128K memory, alphanumeric display, no weatherproofing, #6 screw size mtg. back cover, rear wire exit and 5VDC supply.

Options Available

Optics

Visible – V
Infrared – I

Resolution

Low – L
High – H

Interface

RS232 – S
RS422/485 – 2
TCP/IP – C

Memory

128K – 1
512K – 5

Display

No display – 0
Alphanumeric display – A

Weatherproofing

No weatherproofing – 0
Weatherproofing – W

Cover

#6 – 6
3mm – M

Wire Exit

Rear – R
Side – S
Internal battery (portable) - I
Side internal jacks (portable) - J
Internal battery/external AC – A
Read exit w/side headset jack* – 4

Voltage

5VDC – 5
12VDC – 2
24VDC – 4
P – POE

* 4 position side headset jack available for communications on fixed mount units only. Power and relay wiring remains in the rear.



International Bar Code

160 Oak St., Glastonbury, CT 06033 USA Tel: (860) 659-9660 Fax: (860) 657-3860